



- + Instant Notifications
- + Easy do-it-yourself Installation
- + 11n Wireless Connectivity



mydlink™ enabled



Wireless N Day/Night Home Network Camera

Round the clock surveillance

Smaller than your average wallet with Wireless N technology¹, the D-Link® Wireless N Day/Night Home Network Camera (DCS-932L), is the perfect camera for your home or small office. The Built-in IR LEDs lets you see what is going on even when there is little or no light. A compact design with integrated antenna, you can place the DCS-932L virtually anywhere, even in the smallest corners of your home. You can easily view what is going on at home without having to be there via the Internet, or from the mydlink™ app. Set up a camera near your entryway or in any room to monitor what is happening around the house, day & night. The Wireless N Day/Night Home Network Camera is ideal for every household.

Benefits of mydlink™

mydlink™ products are created for people who long to embrace a world connected through the Internet, but are afraid they lack the technical expertise to do so. mydlink removes the learning curve that is typically associated with today's high-tech devices because they are truly plug-and-play with easy configuration. mydlink provides you easy and straightforward access to your digital life all from our intuitive, convenient website (www.mydlink.com). mydlink makes it easy to get the most from your digital lifestyle without the learning curve.


Convenient Access, Anywhere, Anytime

As a mydlink-enabled device, you can access the DCS-932L anytime, anywhere you have Internet access. Get peace of mind by keeping an eye on your kids, pets, home or office from almost anywhere by simply logging on to the mydlink website and selecting your camera or download the free mydlink™ app from the App store² or Android™ market³ for on-the-go live video viewing. Since the DCS-932L comes with a built-in microphone, you can see and hear for yourself that everything is well at home.

Camera Management

For advanced users that want more out of their camera, the DCS-932L also comes with D-Link's D-ViewCam™ management software. D-ViewCam comes with a host of features including the ability to record directly from the camera to a local hard drive, trigger motion detection, set recording schedules, set e-mail alert notifications, and even support for up to 32 cameras. D-ViewCam also allows you to upload a floor plan of your home or small business and create a realistic layout of where your cameras are located, providing you with better access to your camera. For even greater recording flexibility, you can record video directly to a Network Attached Storage (NAS) device, eliminating the need for a dedicated computer to store video.

Various Viewing Applications

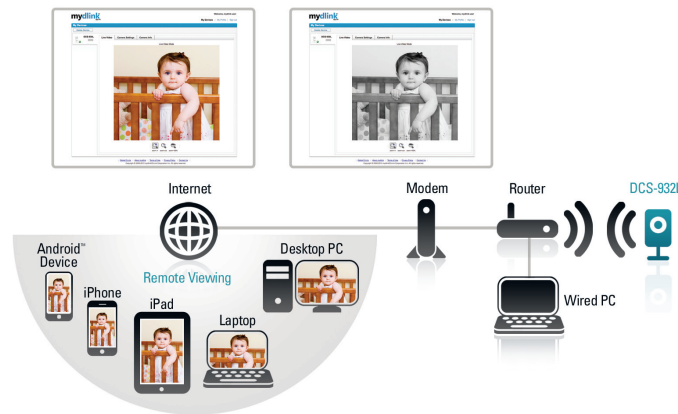

Technical Specifications

Network Protocol

- + IPv4, ARP, TCP, UDP, ICMP
- + DHCP Client
- + NTP Client (D-link)
- + DNS Client
- + DDNS Client (DynDNS and D-link)
- + SMTP Client
- + FTP Client
- + HTTP server
- + PPPoE
- + UPnP Port Forwarding
- + LLTD

Built-in Network Interface

- + 10/100Base-TX Fast Ethernet
- + 802.11b/g/n WLAN

Wireless Connectivity

- + 802.11b/g/n Wireless with WEP/WPA/WPA2 security

Wireless Transmit Output Power

- + 16 dbm for 11b, 12 dbm for 11g, 12 dbm for 11n (typical)

SDRAM

- + 32 MB

Flash Memory

- + 4 MB

Reset Button

- + Reset to factory default

Video Codecs

- + MJPEG
- + JPEG for still images

Video Features

- + Adjustable image size and quality
- + Time stamp and text overlay
- + Flip and Mirror

Resolution

- + 640 x 480 at up to 20 fps
- + 320 x 240 at up to 30 fps
- + 160 x 120 at up to 30 fps

Lens

- + Focal length: 5.01 mm, F2.8

Sensor

- + VGA 1/5 inch CMOS Sensor
- + Removable IR-Cut filter: auto/schedule/manual

IR LED

- + 5 meter illumination distance

Minimum Illumination

- + Color: 1 Lux @ F2.8
- + B/W: 0 Lux with IR LED on

View Angle

- + Horizontal: 45.3°
- + Vertical: 34.5°
- + Diagonal: 54.9°

Digital Zoom

- + Up to 4x

3A Control

- + AGC (Auto Gain Control)
- + AWB (Auto White Balance)
- + AES (Auto Electronic Shutter)

Power

- + Input: 100-249 V AC, 50/60Hz
- + Output: 5 V DC, 1.2A
- + External AC-to-DC switching power adapter

Max Power Consumption

- + 2 W

Operation Temperature

- + 32°F to 140°F (0°C to 40°C)

Storage Temperature

- + -4°F to 158°F (-20°C to 70°C)

Humidity

- + 20-80% RH Non-Condensing

Dimensions (W x D x H)

- + Including the bracket and stand:
2.6" x 2.6" x 5" (65.8mm x 65mm x 126mm)

Camera only

- + 1.1" x 2.4" x 3.8" (27.2mm x 60mm x 96mm)

Certifications

- + FCC Class B
- + IC
- + C-Tick
- + CE

Support

- + 24/7 Basic Installation Support²

Warranty

- + 1-Year Limited³

¹Maximum wireless signal rate derived from IEEE Standard 802.11 specifications. Actual data throughput will vary. Network conditions and environmental factors, including volume of network traffic, building materials and construction, and network overhead, lower actual data throughput rate. Environmental factors will adversely affect wireless signal range. Wireless range and speed rates are D-Link RELATIVE performance measurements based on the wireless range and speed rates of a standard Wireless G product from D-Link. Maximum throughput based on D-Link's 802.11n devices. ²24/7 Basic Installation Support is available only in the USA for the first 30 days from date of original purchase. ³1-Year Limited Warranty available only in the USA and Canada. ⁴Computer must adhere to Microsoft's recommended system requirements. ⁵D-ViewCam software included is not Mac-compatible. ⁶Latest Software and Documentation available at <http://support.dlink.com>. ⁷The inclusion of a specific product or manufacturer does not imply its endorsement of D-Link or the D-Link product.

©2011 D-Link Corporation/D-Link Systems, Inc. All rights reserved. D-Link, the D-Link logo, the D-Link RoHS logo, D-ViewCam, and mydlink are trademarks or registered trademarks of D-Link Corporation or its subsidiaries in the United States and/or other countries. Other trademarks or registered trademarks are the property of their respective owners. iPhone and iPad are registered trademarks of Apple Inc. Android is a trademark of Google Inc.

Minimum System Requirements for Installation

- + Wired (10/100 Fast Ethernet) or Wireless (802.11g or 802.11n) Network
- (Wireless N network recommended for optimum wireless performance)
- Computer with:
 - + 1.3GHz Processor
 - + 128MB Memory
 - + Windows® 7⁴, Windows Vista⁴ and Windows® XP SP2⁴,
 - or Mac OS X (10.5 and above, Intel Processor)
- + Internet Explorer® v6, Mozilla® Firefox® v3.0, Google® Chrome v2, or Safari® v4

- + CD-ROM Drive
- For Internet Access:
 - + Cable or DSL Modem
 - + Subscription with an Internet Service Provider (ISP)

Package Contents

- + Wireless N Day/Night Network Camera
- + CAT5 Ethernet Cable
- + Power Adapter
- + Camera Base and Mounting Kit
- + Quick Install Guide
- + CD-ROM with
 - D-View Cam Software⁵
 - Product Documentation⁶