

Product Highlights

Next Generation Connectivity

Ideal for small to medium enterprises with dual-band support for 802.11n and 802.11ac devices and over 1 Gbps combined speed for reliable connections¹

Unparalleled Level of Performance

Experience smooth and stable performance with a powerful CPU, greater coverage with beamforming, and better managed traffic with bandsteering

Versatile Management

AP deployment is efficient and easy with a self-configuring cluster mode for simplified setup and RF resource management for signal weakness detection



Limited
**Lifetime
Warranty**

DWL-6610AP

Dual-Band 802.11ac Unified Wireless Access Point

Features

High Performance Connectivity

- IEEE 802.11ac wireless¹
- Up to 867 + 300 Mbps¹
- Beamforming technology
- Bandsteering for efficient traffic management
- 2 Gigabit Ethernet LAN ports

Ideal for Business

- Self-configuring cluster, enabling effortless provisioning
- Up to 32 virtual access points may be created from a single access point
- Flexible QoS with WMM
- Up to 8 DWL-6610AP units may form a self-configuring cluster

Trusted Security

- WPA/WPA2 Personal
- WPA/WPA2 Enterprise
- MAC address filtering
- Rogue AP detection

Convenient Installation

- Can be easily mounted on a wall or ceiling
- 802.3at Power over Ethernet (PoE) enables installation in hard-to-reach locations³
- UL2043 certified Plenum rated housing for placement in air passageways

Overview

The DWL-6610AP Dual-Band 802.11ac Unified Wireless Access Point is specially designed for small to medium enterprises, providing unparalleled bandwidth and flexibility for administrators looking to deploy a medium to large scale Wi-Fi network. Featuring the latest 802.11ac on its 5 GHz band, the DWL-6610AP brings you to the forefront of wireless technology.

Greater Reach and Flexibility

The DWL-6610AP provides unparalleled connectivity by using a 2 x 2 antenna implementation, allowing high combined data rates of 1167 Mbps¹ (AC867 Mbps + N300 Mbps) over the air. Beamforming technology enables the DWL-6610AP to have even greater reach than its predecessor, allowing even more flexibility in any deployment scenario. With the 802.11n/ac technology, the DWL-6610AP provides the high performance over two bands, so wireless clients can stream media faster and farther than before using existing devices.

Centrally Manage your Wireless Network

When working in conjunction with D-Link Unified Switches/Controllers, the DWL-6610AP can be centrally managed. This allows for a large number of APs to be deployed and managed easily and efficiently. Once the APs are discovered by the switch/controller, the administrator can push specific configuration sets onto them rather than having to do so individually. In addition, RF resource management and security are also managed centrally, allowing the administrator to preemptively identify potential deficiencies and weaknesses in the network.

Self-Configuring Cluster

For small businesses that need to deploy multiple APs but lack the resources to tackle the complicated task of network management, the DWL-6610AP's self-configuring cluster feature offers the ideal solution. When a small number of DWL-6610APs are deployed on the network, they may be configured to form a self-configuring cluster. Once the administrator configures

Dual-Band 802.11ac Unified Wireless Access Point

one access point, the same configuration can then be applied to all remaining APs. Up to 8 APs may be used to form a cluster, making setting up your business wireless network a breeze.

Upgraded for Superior Performance

The DWL-6610AP features a more powerful CPU, giving it a performance boost over its predecessor. The high gain internal omnidirectional antenna increases its reach, eliminating dead spots and filling hard to reach places. Bandsteering technology enables the AP to balance the load between its two radios rather than forcing all users onto the 2.4 GHz band, allowing for smooth streaming of video, instant transmission of SMS and e-mail, and fast downloads for mobile devices.

Automatic RF Management Saves Power and Money

When a number of access points are deployed close to each other, interference may result if proper RF management isn't implemented. When a DWL-6610AP senses a neighbor nearby, it will automatically select a non-interfering channel. This greatly reduces RF interference and will allow the administrator to deploy APs more densely. To further minimize interference, when a nearby AP is operating on the same channel, the DWL-6610AP will automatically lower its transmission power.² When, for whatever reason, the nearby AP is no longer present, the DWL-6610AP will increase its transmission power to expand coverage.

Quality of Service for Increased Connectivity

The DWL-6610AP supports 802.1p Quality of Service (QoS) for enhanced throughput and better performance of time-sensitive traffic like VoIP and

streaming DSCP. The DWL-6610AP is WMM-certified, so in the event of network congestion, time-sensitive traffic can be given priority ahead of other traffic. Furthermore, when a number of DWL-6610AP units are in close proximity to each other, an access point will refuse new association requests once its resources are fully utilized, allowing the association request to be picked up by a neighboring unit. This feature ensures that no single AP is overburdened while others nearby sit idle.

Easy and Convenient Installation

With internal antennas and a simple housing, the DWL-6610AP can be installed on a wall or ceiling and blends in with most office environments. Enclosed in a plenum-rated chassis, the DWL-6610AP adheres to strict fire regulations for placement in air passageways. For easy installation, it has integrated 802.3at Power over Ethernet (PoE) support, allowing installation of this device in areas where power outlets are not readily available. The DWL-6610AP can also be powered by a separately purchased AC/DC power adapter or PoE injector.

Limited Lifetime Warranty

D-Link offers a Limited Lifetime Warranty on the DWL-6610AP Access Point to further its commitment to product quality and long-term customer confidence.


Technical Specifications		
General		
Interfaces	<ul style="list-style-type: none"> • 802.11b/g/n 2.4 GHz wireless • 802.11ac 5 GHz wireless • One 10/100/1000 LAN port • RJ45 console port 	<ul style="list-style-type: none"> • Factory reset button • Power switch • Power connector
Antenna	<ul style="list-style-type: none"> • Internal omnidirectional antennas 	<ul style="list-style-type: none"> • 6.5 dBi for 5 GHz, 5 dBi for 2.4 GHz
Power Method	<ul style="list-style-type: none"> • Powered by PoE or 12 V / 2 A 	
Functionality		
Operating Channel	<ul style="list-style-type: none"> • 2.4 / 5 GHz 	<ul style="list-style-type: none"> • 11 channels for United States
Web-based User Interface	<ul style="list-style-type: none"> • HTTP/HTTPS 	
Command Line	<ul style="list-style-type: none"> • RJ45 Serial Console • Telnet/SSH 	<ul style="list-style-type: none"> • SNMP
Security		
SSID Security	<ul style="list-style-type: none"> • Up to 32 SSIDs, 16 per radio • 802.1Q VLAN 	<ul style="list-style-type: none"> • Station Isolation
Wireless Security	<ul style="list-style-type: none"> • WPA Personal/Enterprise 	<ul style="list-style-type: none"> • AES and TKIP
Detection & Prevention	<ul style="list-style-type: none"> • Rogue and Valid AP Classification 	
Authentication	<ul style="list-style-type: none"> • MAC Address Filtering 	

Dual-Band 802.11ac Unified Wireless Access Point


Physical	
Dimensions	• 6.25 x 2.73 in (158.79 x 69.39 mm) without bracket
Weight	• 1.1 lbs (500 grams)
Power Adapter	• Input: 100 to 240 V AC • Output: 12 V DC, 2 A
Max Power Consumption	• 16.6 W
Power over Ethernet	• 10/100/1000 Mbps PoE (802.3at) input
Enclosure	• Bottom cover – plastic • Top cover – plastic • UL2043 certified chassis
Temperature	• Operating: 32 to 104° F (0 to 40° C) • Storage: -4 to 149° F (-20 to 65° C)
Humidity	• Operating: 10% to 90% non-condensing
Certifications	<ul style="list-style-type: none"> • CE • EN 301 893 V1.7.1 (2012-06) (DFS/TPC) • EN 300 328 V1.8.1 (2012-06) • FCC • IC • cUL • LVD • UL2043 (plenum-rated) • C-Tick • BSMI • NCC • Wi-Fi

Radio Patterns

2.4 GHz Antenna Ceiling Mounted

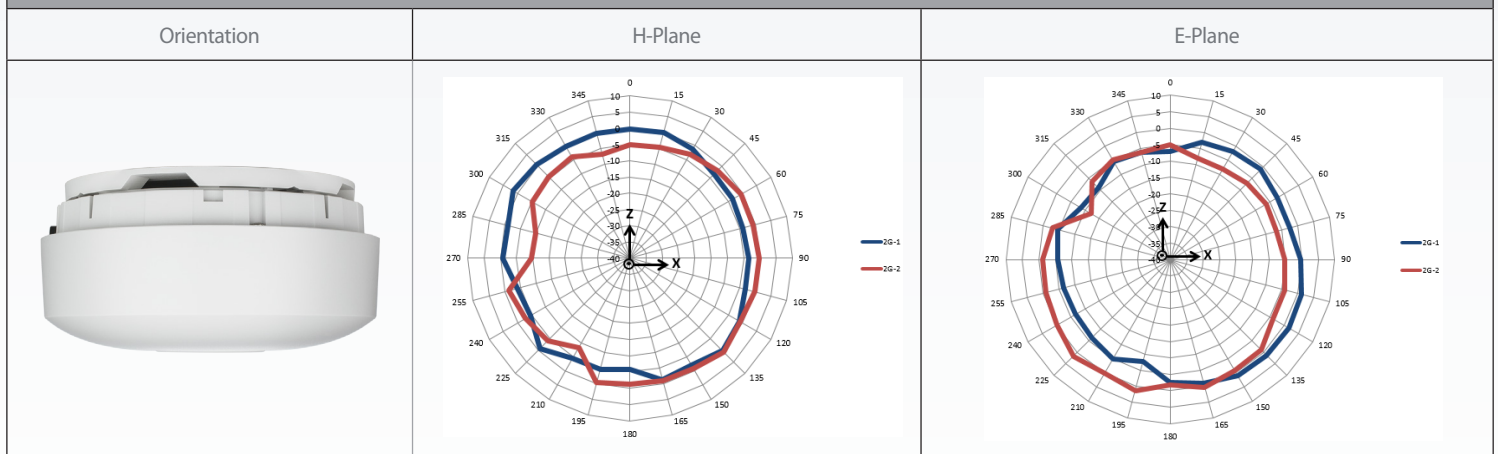


2.4 GHz Antenna Wall Mounted

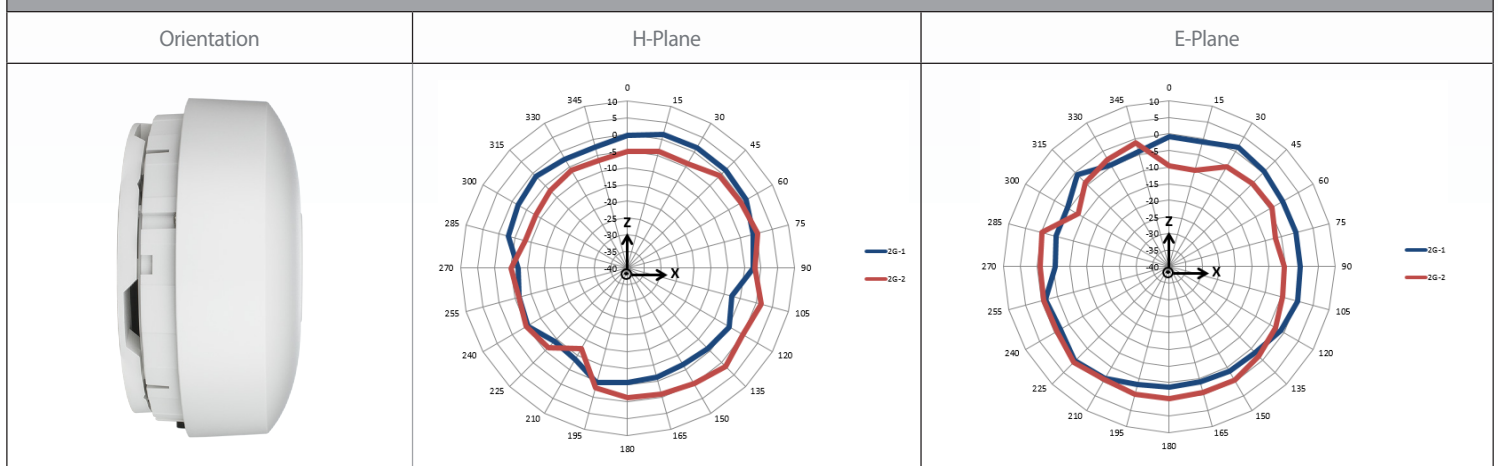


Dual-Band 802.11ac Unified Wireless Access Point

5 GHz Antenna Ceiling Mounted

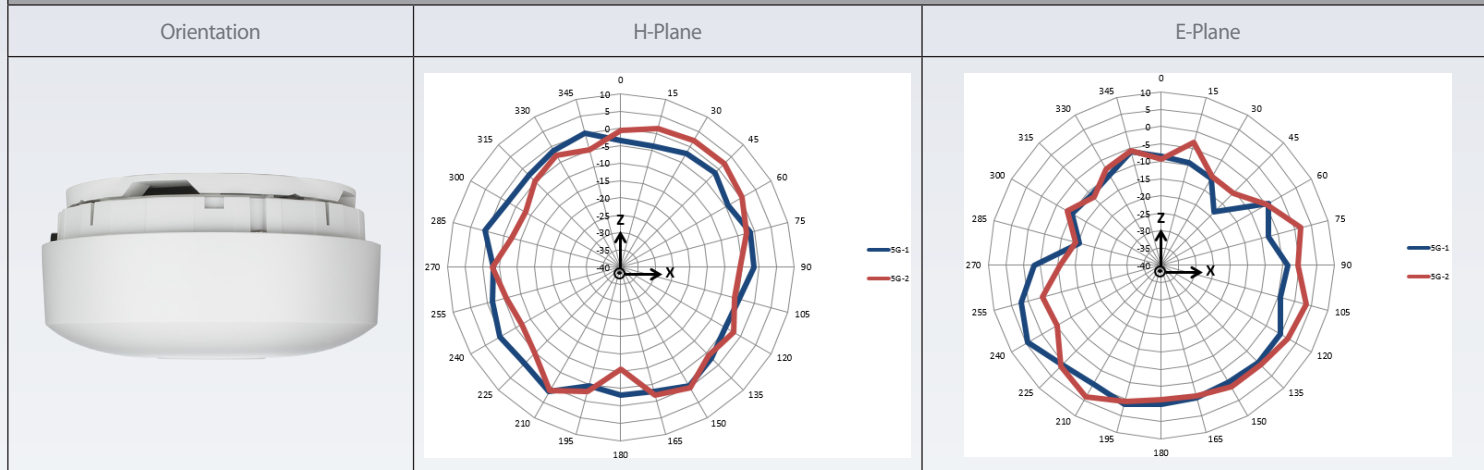

5 GHz Antenna Wall Mounted

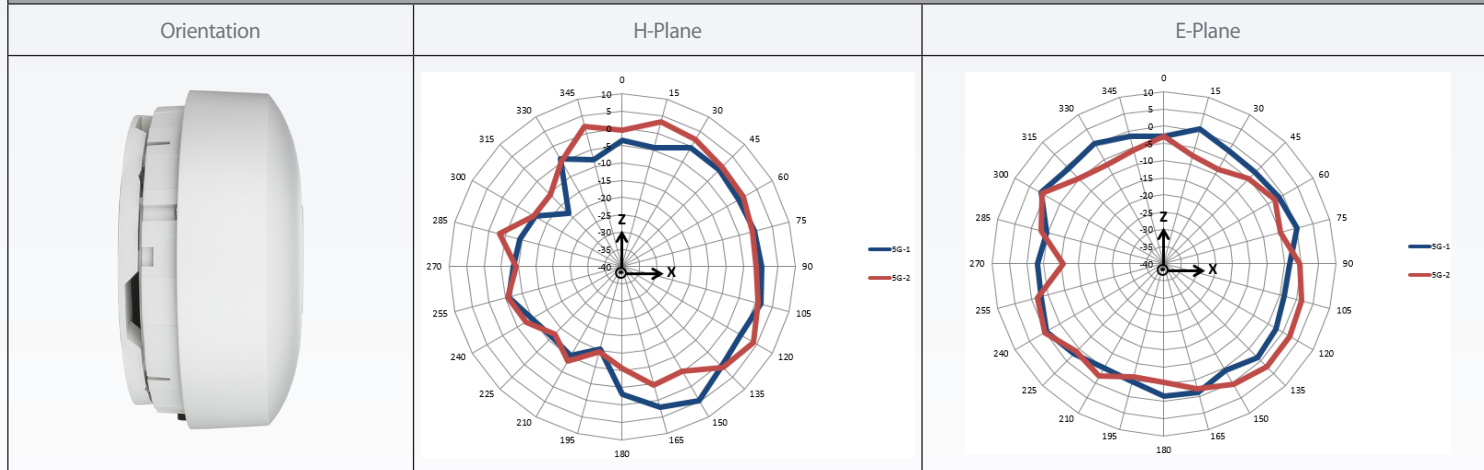

Warranty Information

Warranty	• Limited Lifetime ⁴
----------	---------------------------------

Order Information

Part Number	Description
DWL-6610AP	Dual-Band 802.11ac Unified Wireless Access Point

Optional Accessories

PSE-M12V2A	AC/DC Power Adapter, 12 V DC, 2 A
DPE-301GI	Gigabit PoE Injector

¹ Maximum wireless signal rate derived from IEEE standard 802.11ac and 802.11n specifications. Actual data throughput will vary. Network conditions and environmental factors, including volume of network traffic, building materials and construction, and network overhead lower actual data throughput rate. Environmental factors will adversely affect wireless signal range.

² This feature is available when Unified AP is used in conjunction with D-Link's line of Unified Switches and Wireless Controllers.

³ AC/DC power adapter or PoE injector are not included in package

⁴ Limited Lifetime Warranty available only in USA.

For more information

U.S.A. | 17595 Mt. Herrmann Street | Fountain Valley, CA 92708 | 800.326.1688 | us.dlink.com

©2016 D-Link Corporation/D-Link Systems, Inc. All rights reserved. D-Link and the D-Link logo are registered trademarks of D-Link Corporation or its subsidiaries in the United States and/or other countries. Other trademarks or registered trademarks are the property of their respective owners.

All references to speed are for comparison purposes only. Product specifications, size and shape are subject to change without notice, and actual product appearance may differ from that depicted herein.

Visit us.dlink.com for more details.

Version 1.00(US) - July 21, 2016